


## Cable Strippers

Work will be simple and easy for anyone.  
It saves time and trouble stripping cables.

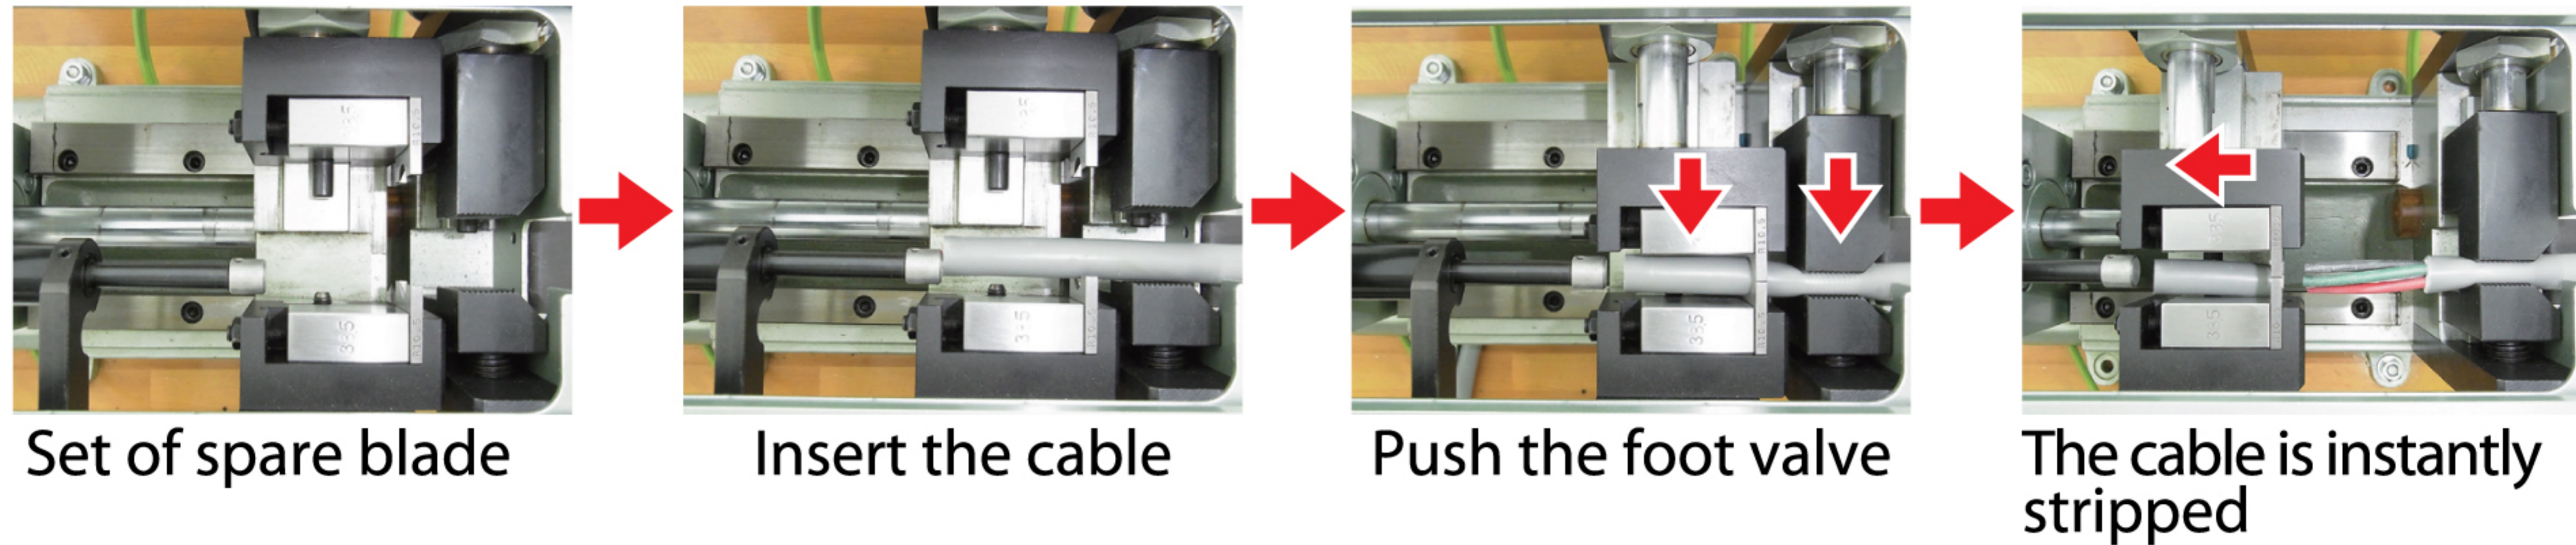

Set of spare blade








Insert the cable

Push the foot valve

The cable is instantly stripped


### Example of application

#### ● Simple stripping

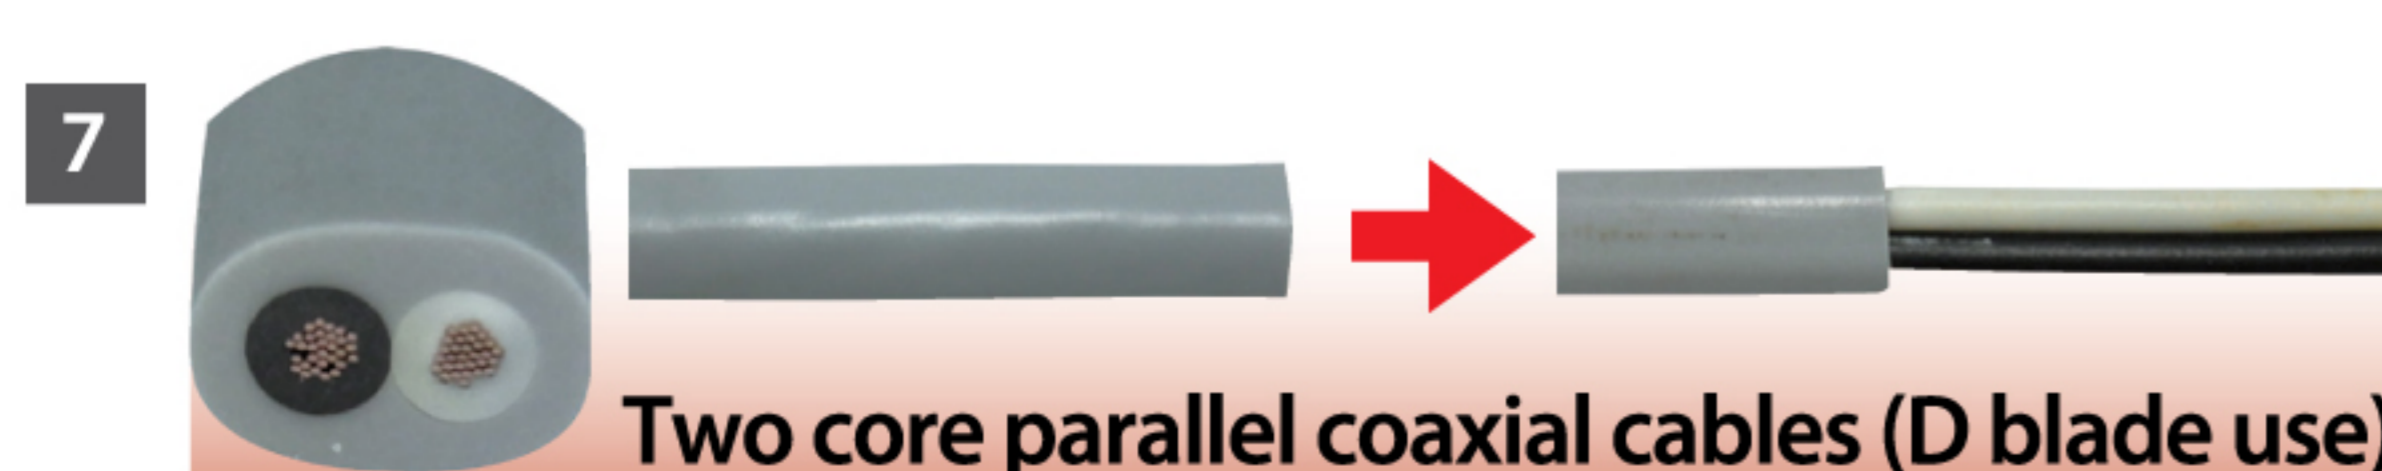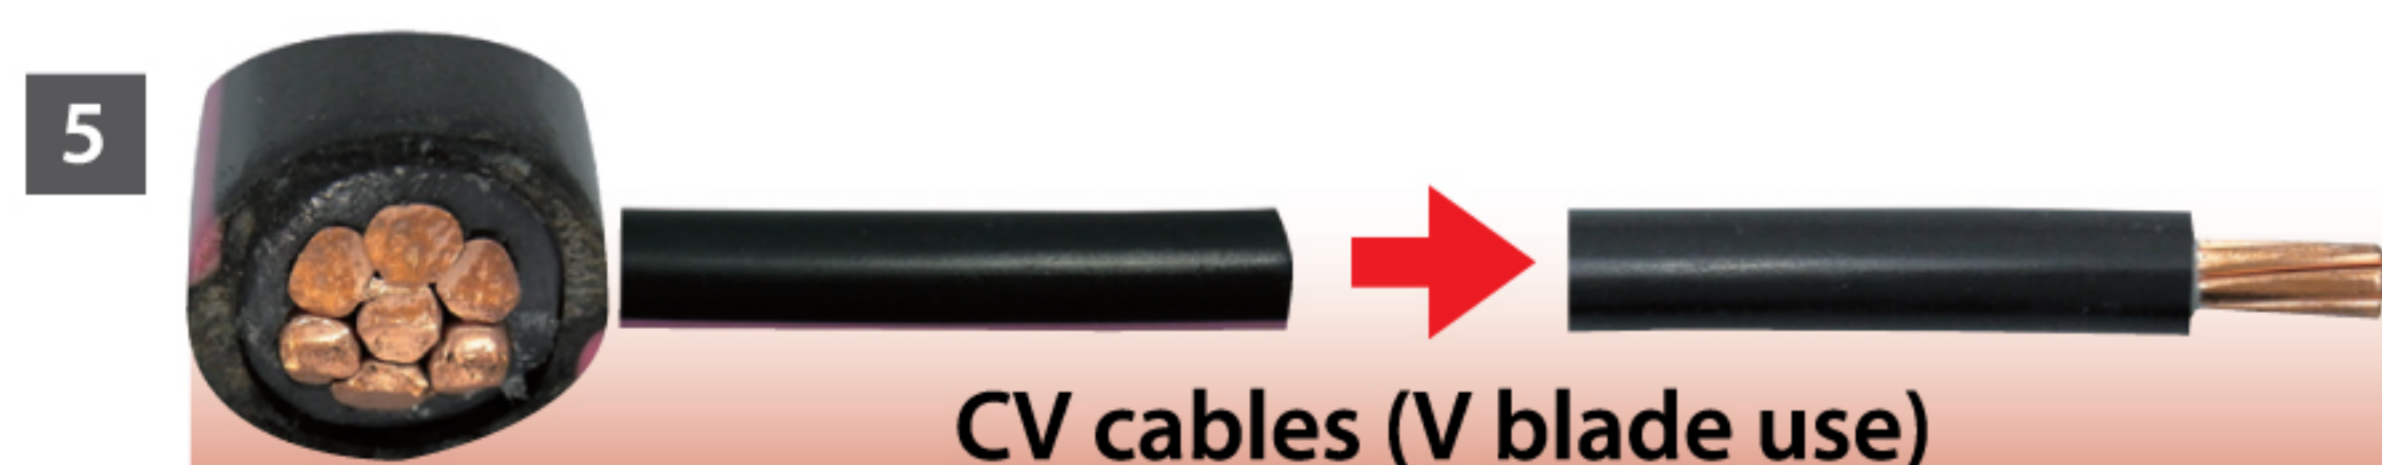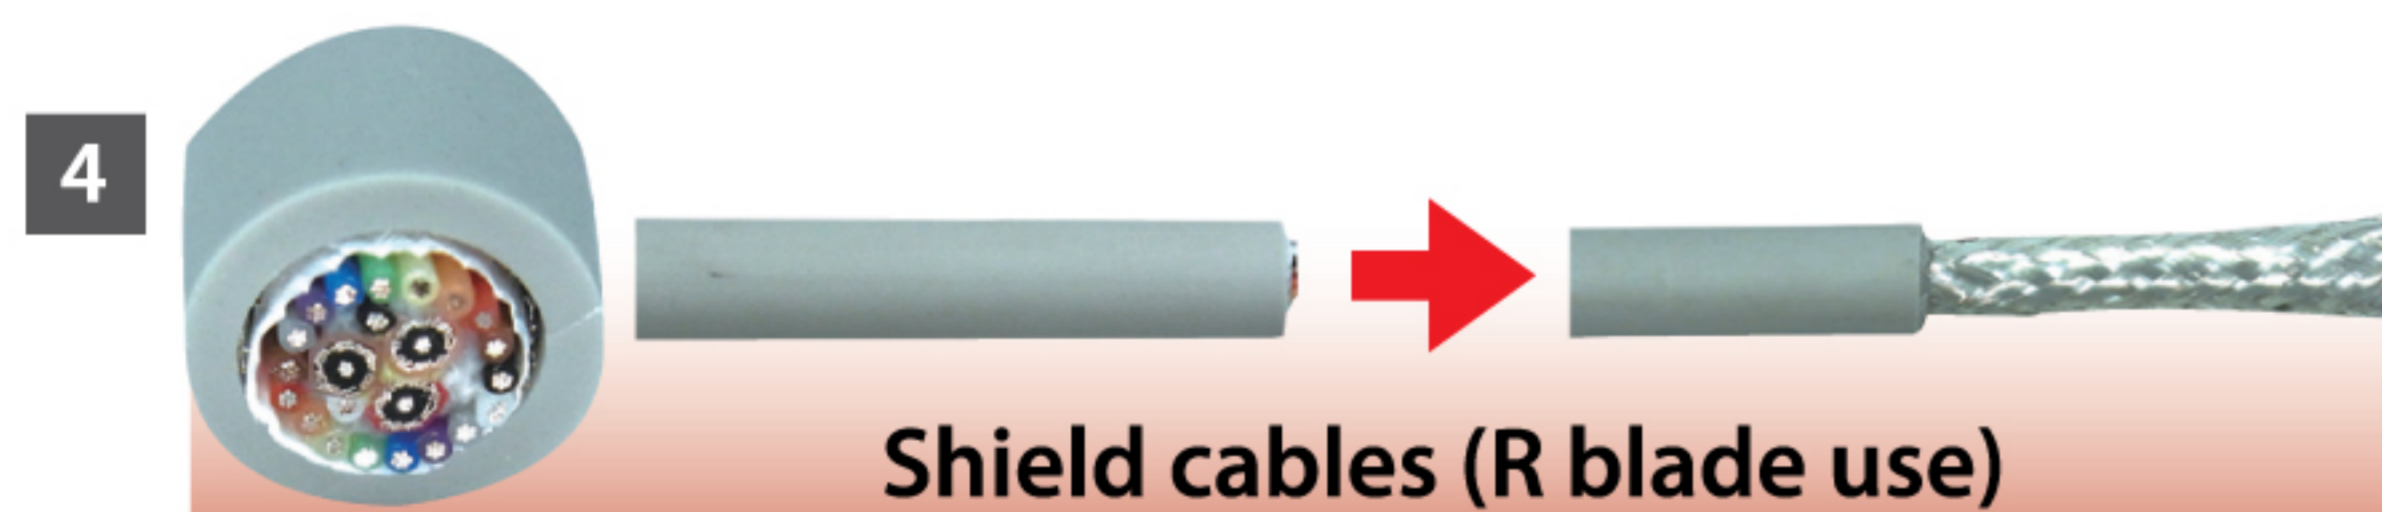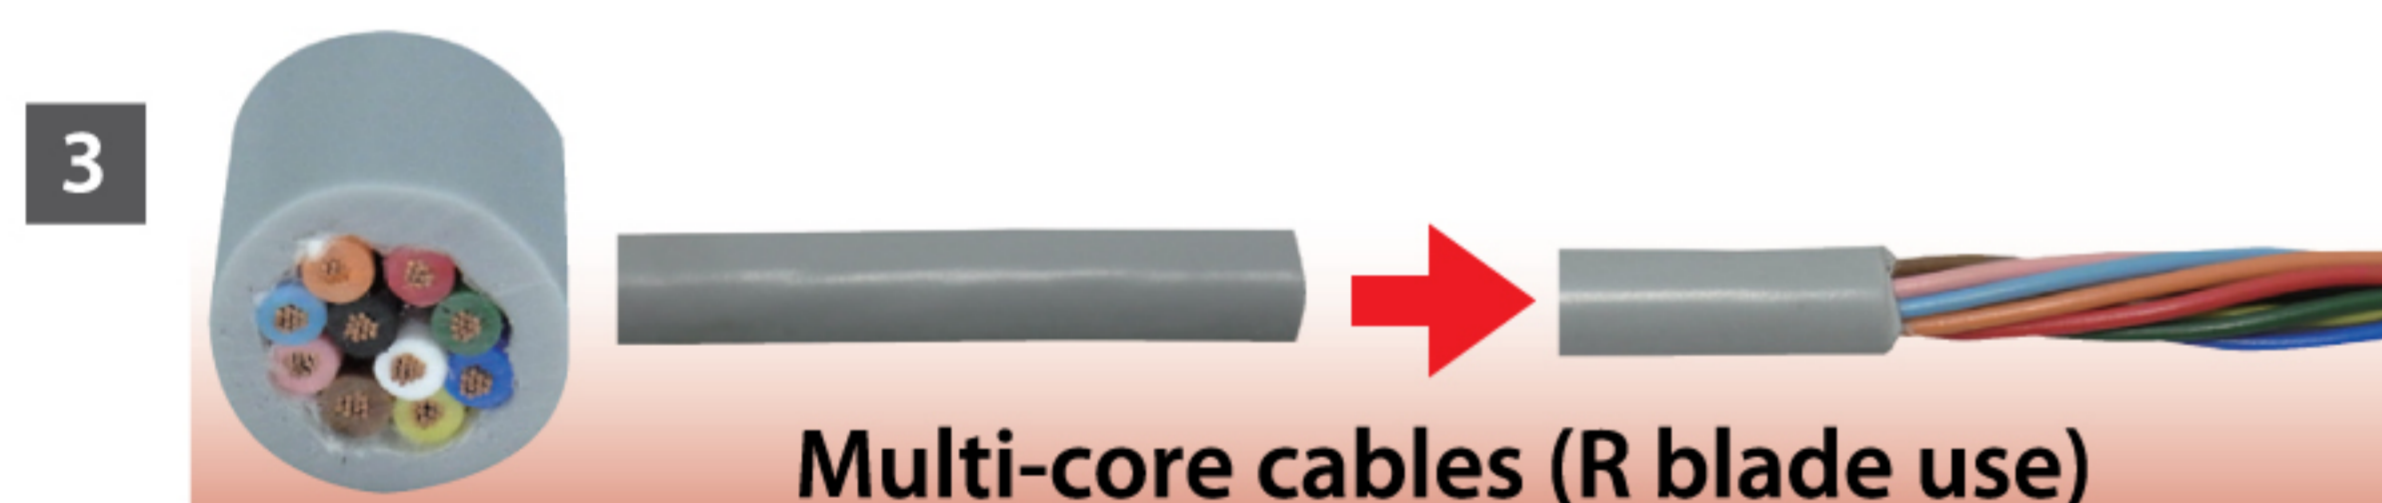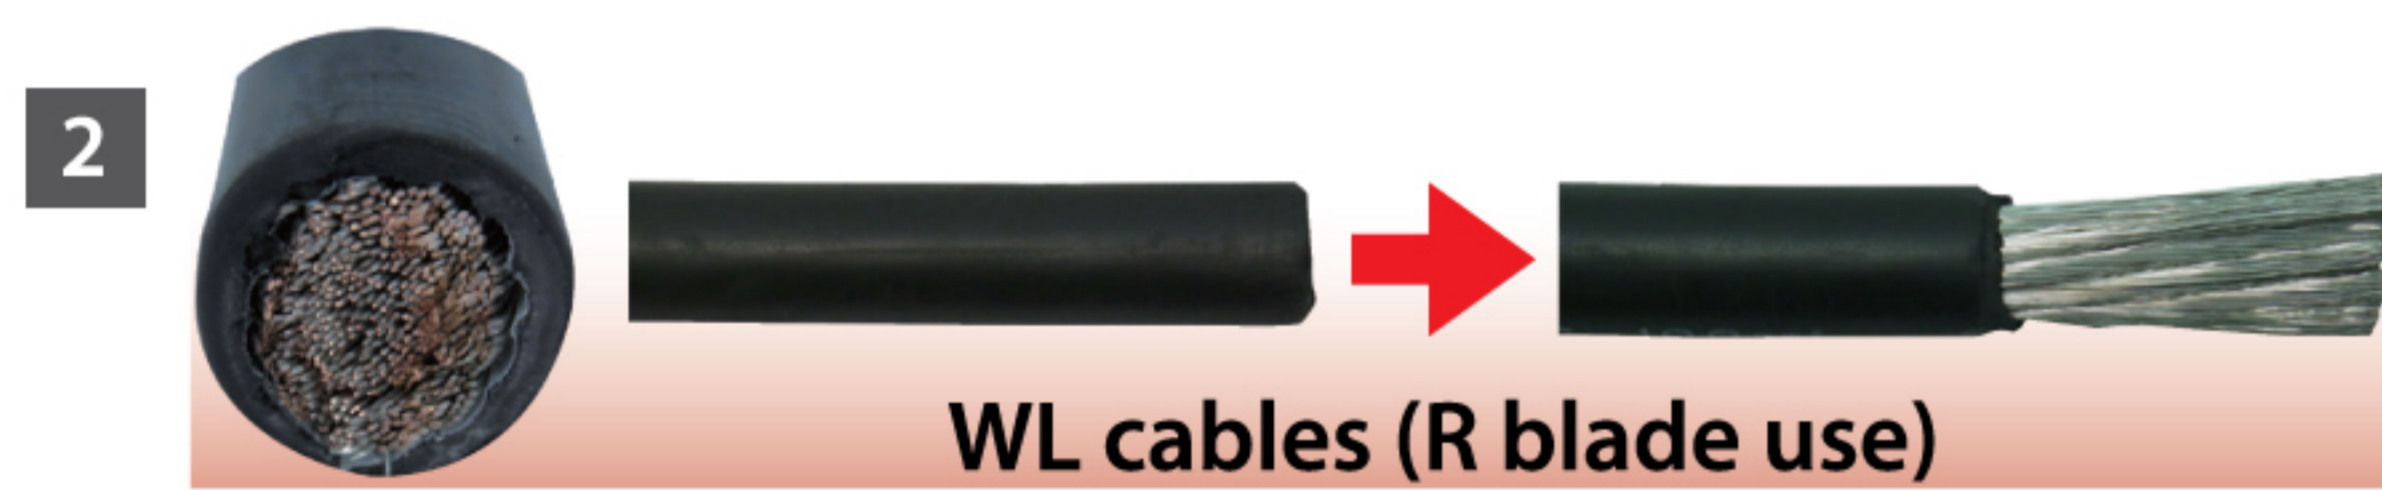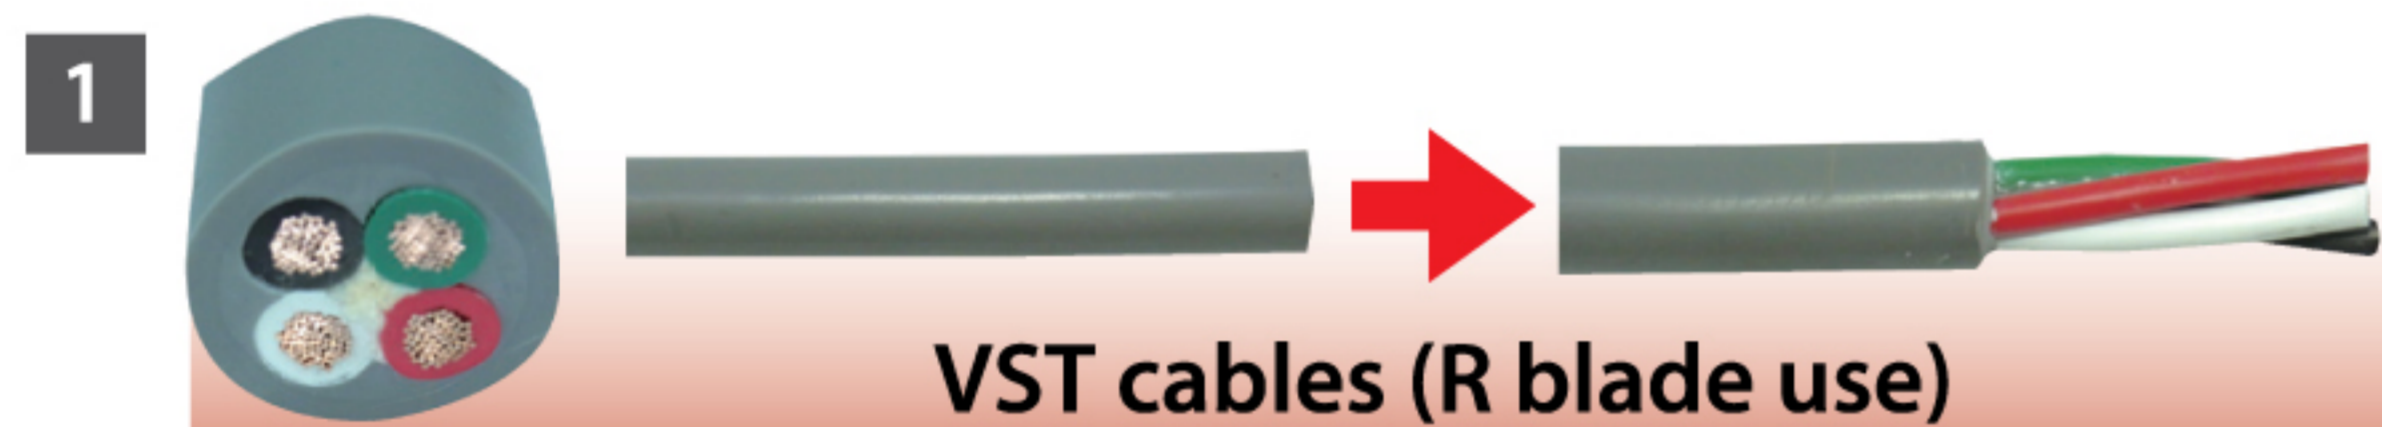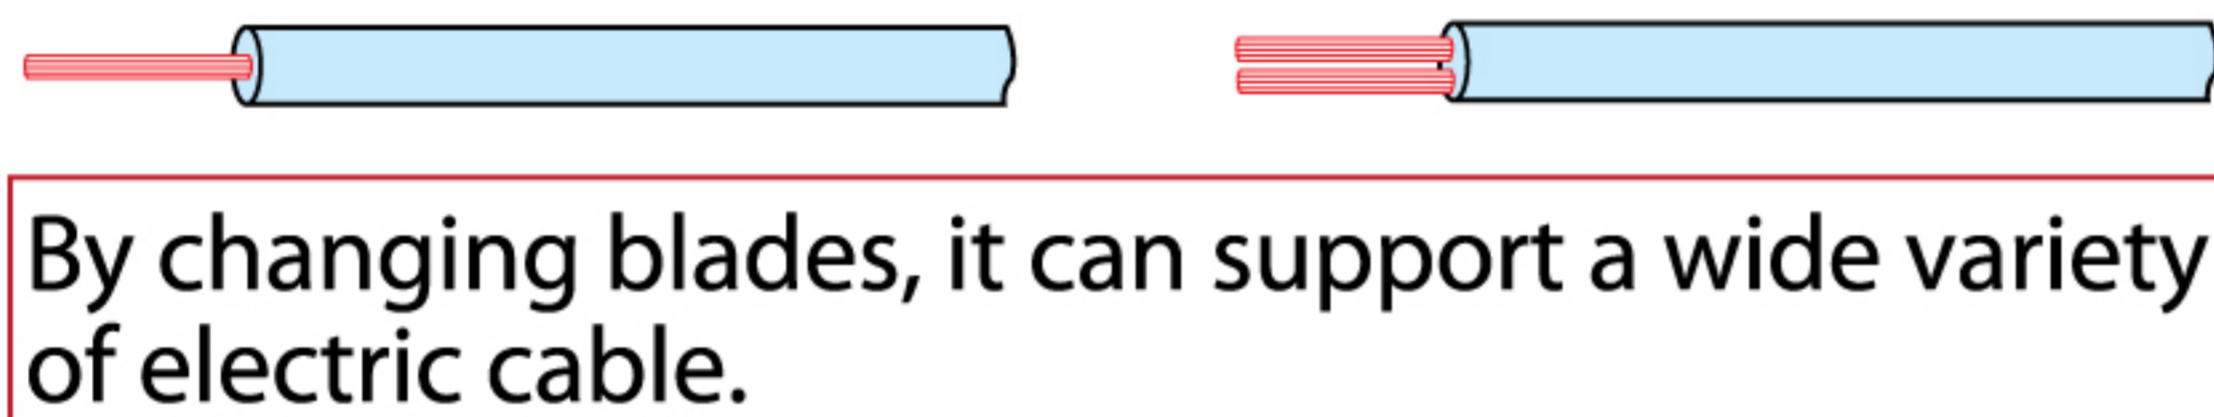


※Electric cable other than the above is also available.  
Please contact us once.


#### ● Simultaneous stripping of the thin cables (S blade use)

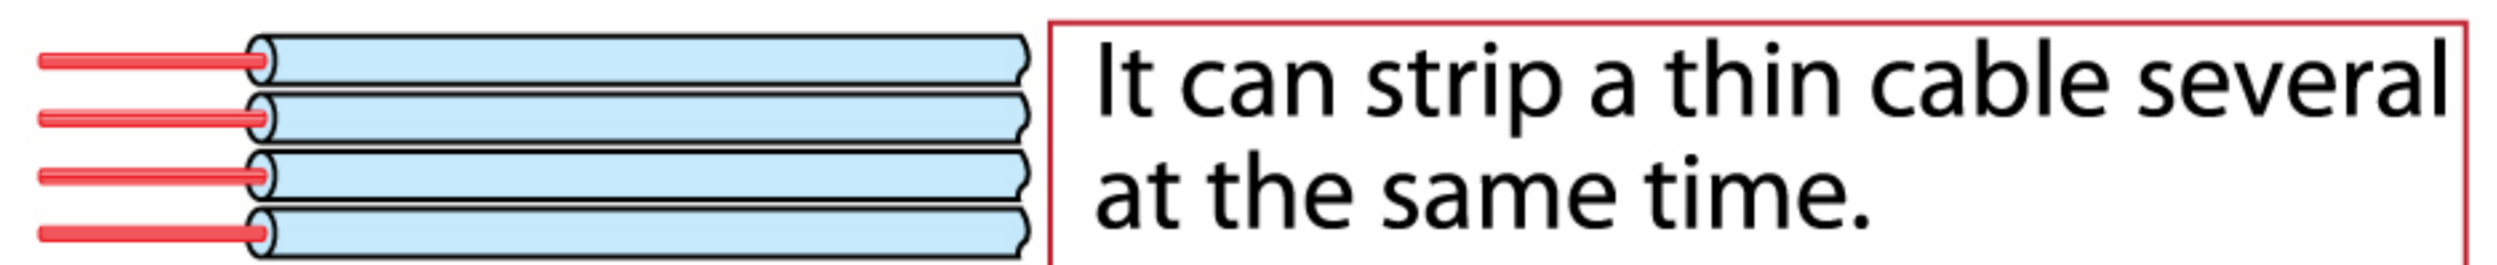


#### ● 2 segment stripping (R&S blade use)

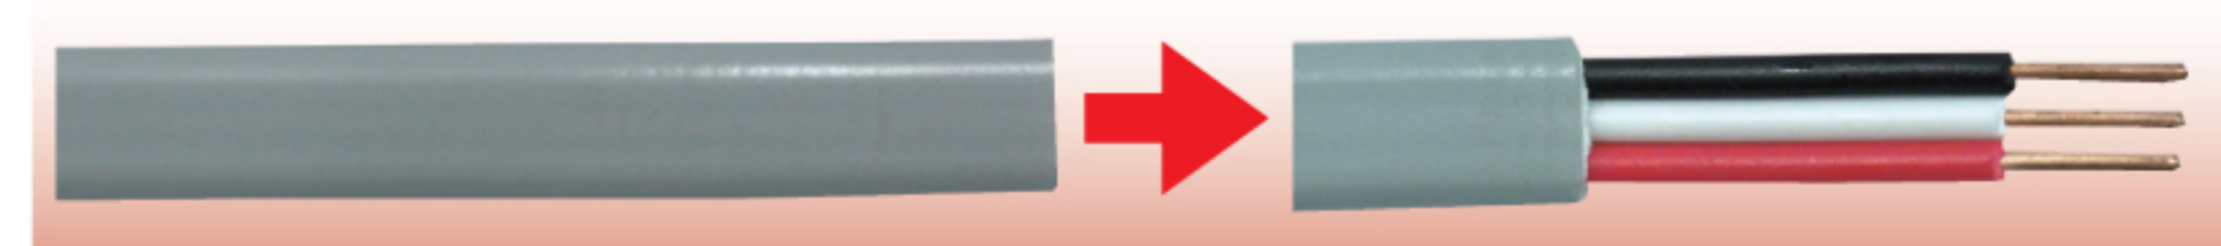

#### ● Simultaneous stripping of the line split cables (SP1 & WR blade use)

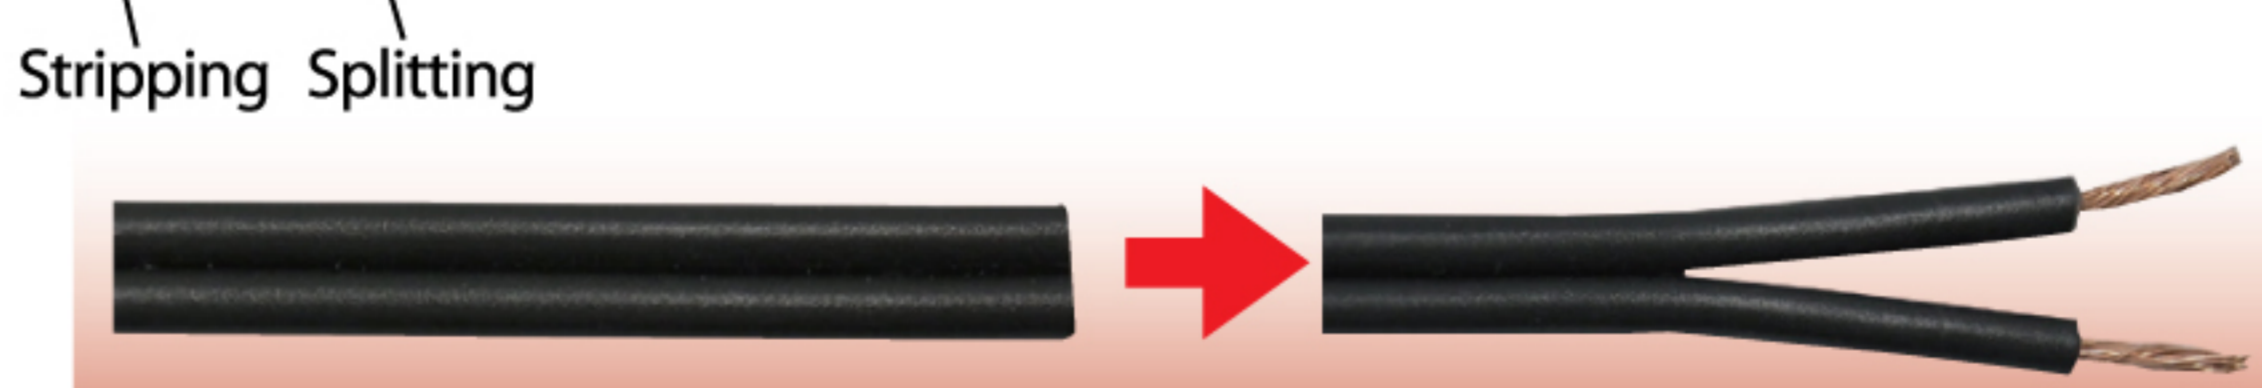



#### ● Middle stripping (R blade use)

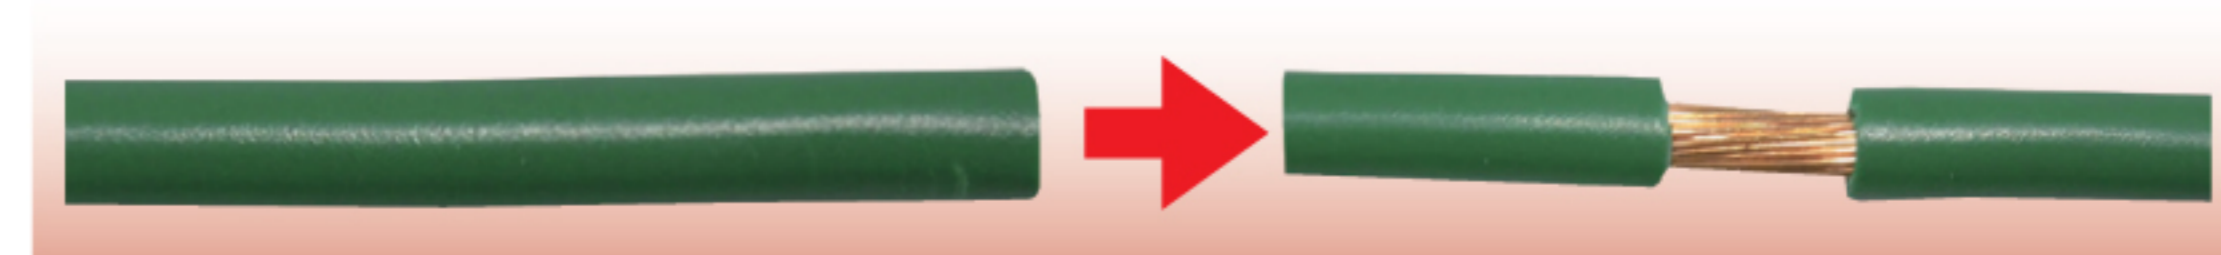



## Cable Strippers

### Blades



R-TYPE

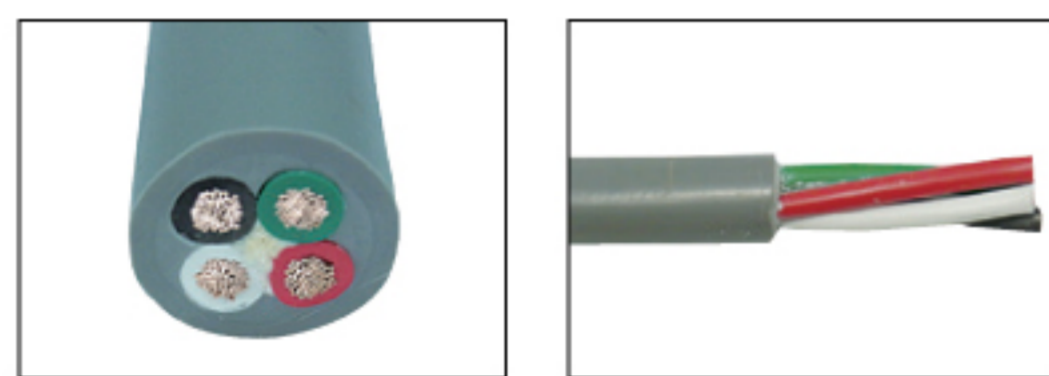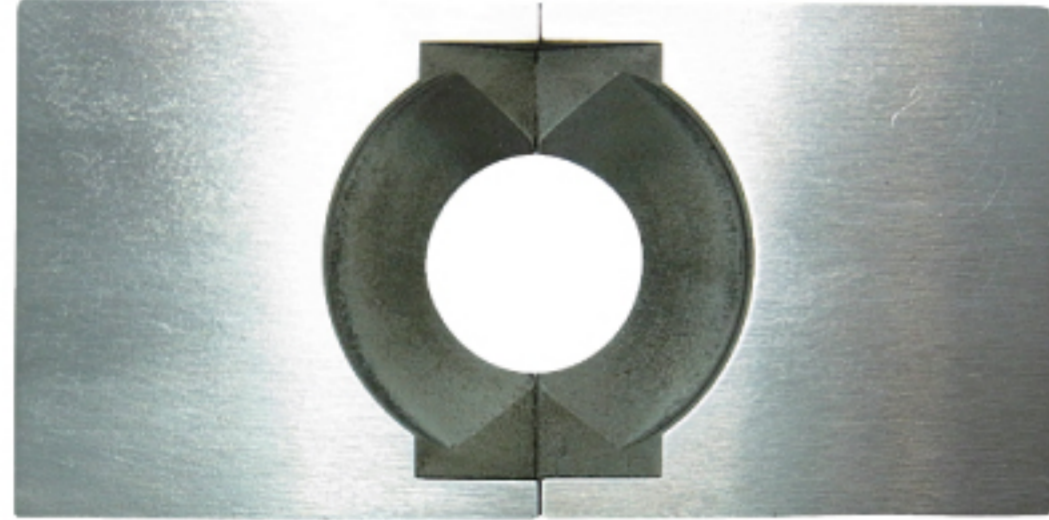



D-TYPE

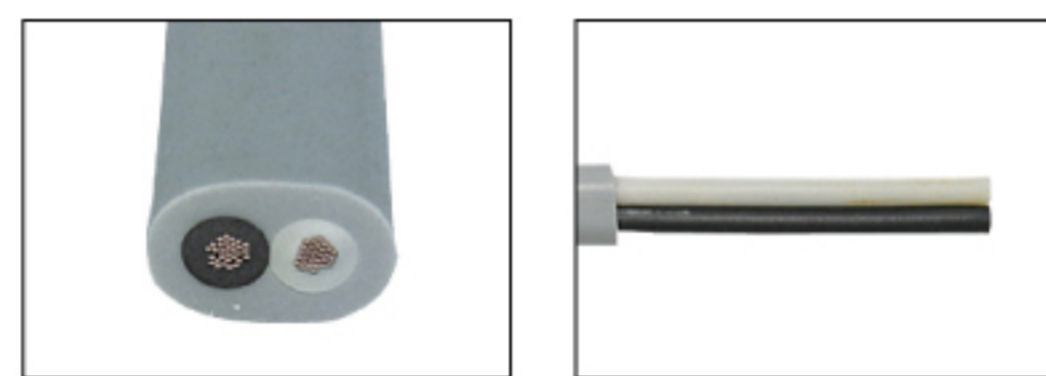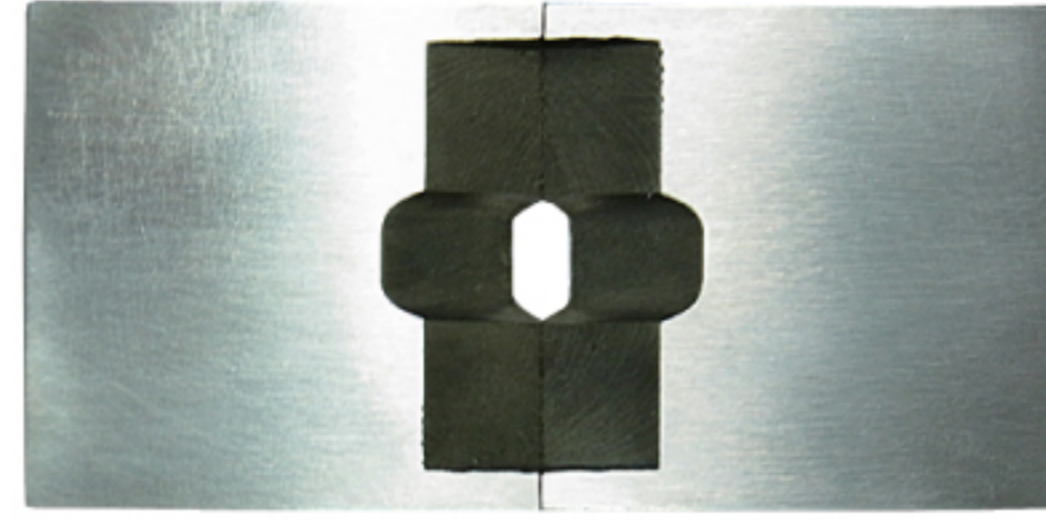

S-TYPE

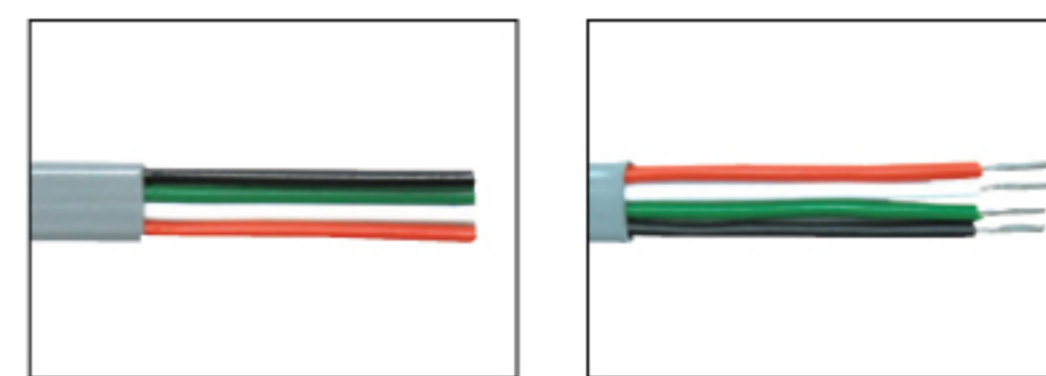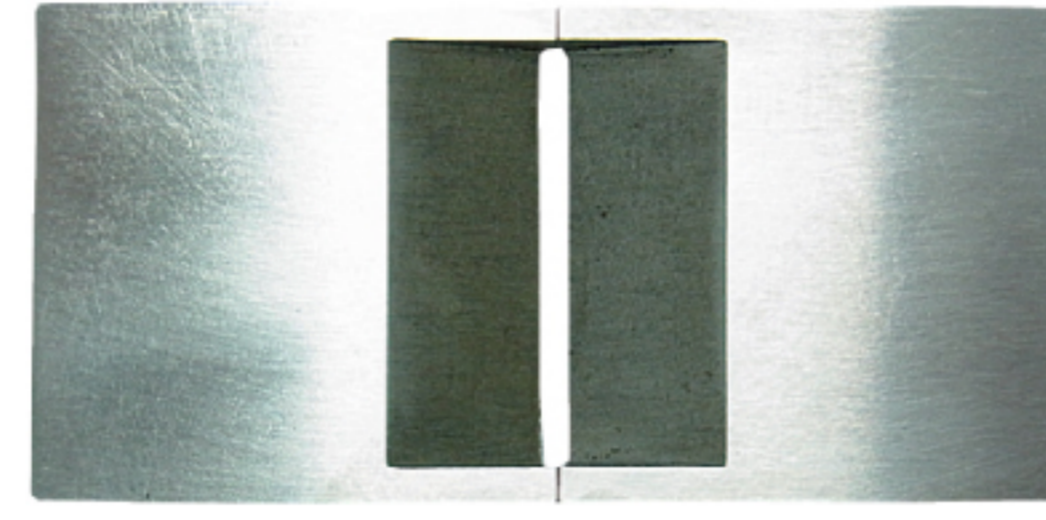



V-TYPE

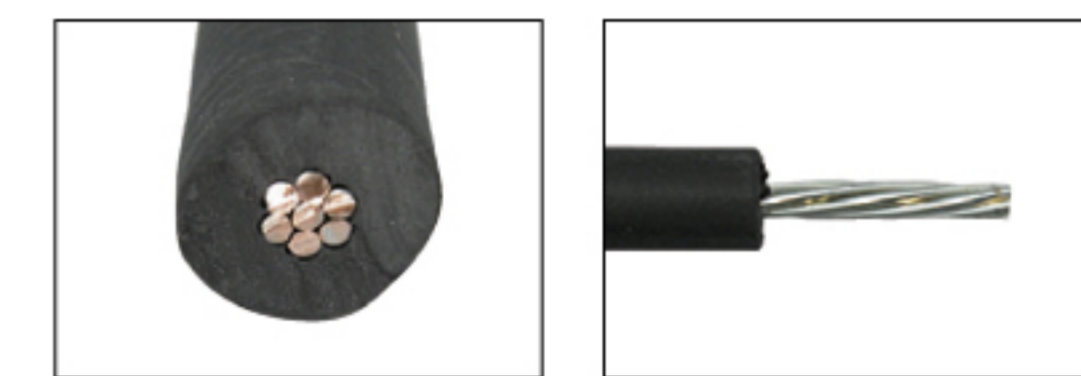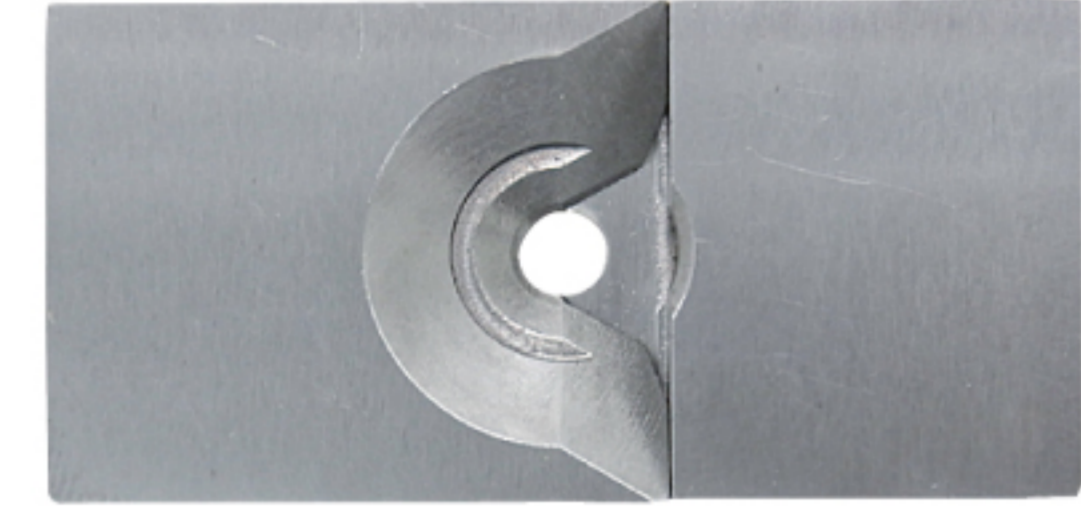


Only the CST35 has standard spare blade set

Set items		
Product for 1.25sq•2.0sq	RW1.25-2.0	1set
Product for 3.5sq•5.5sq	RW3.5-5.5	1set
Product for S0	S0	1set


With case

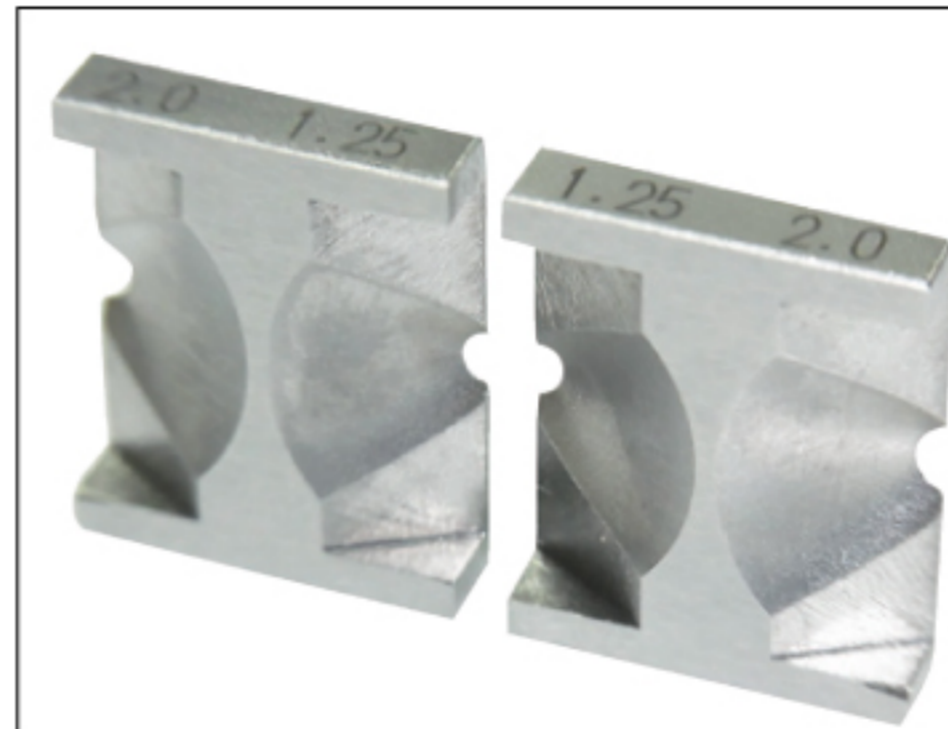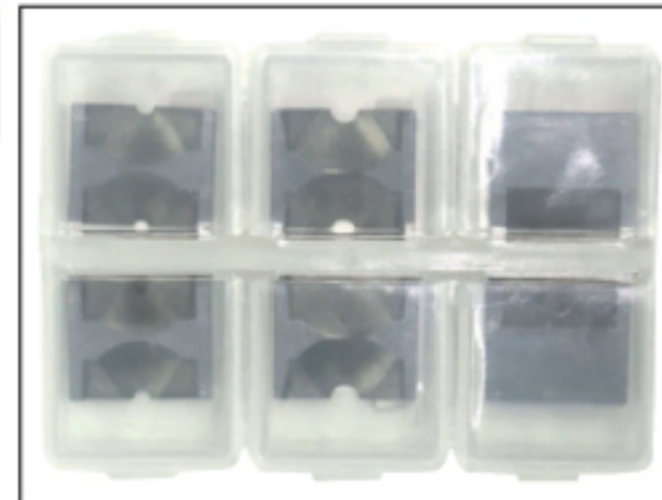

●RW1.25-2.0  
for 1.25sq•2.0sq

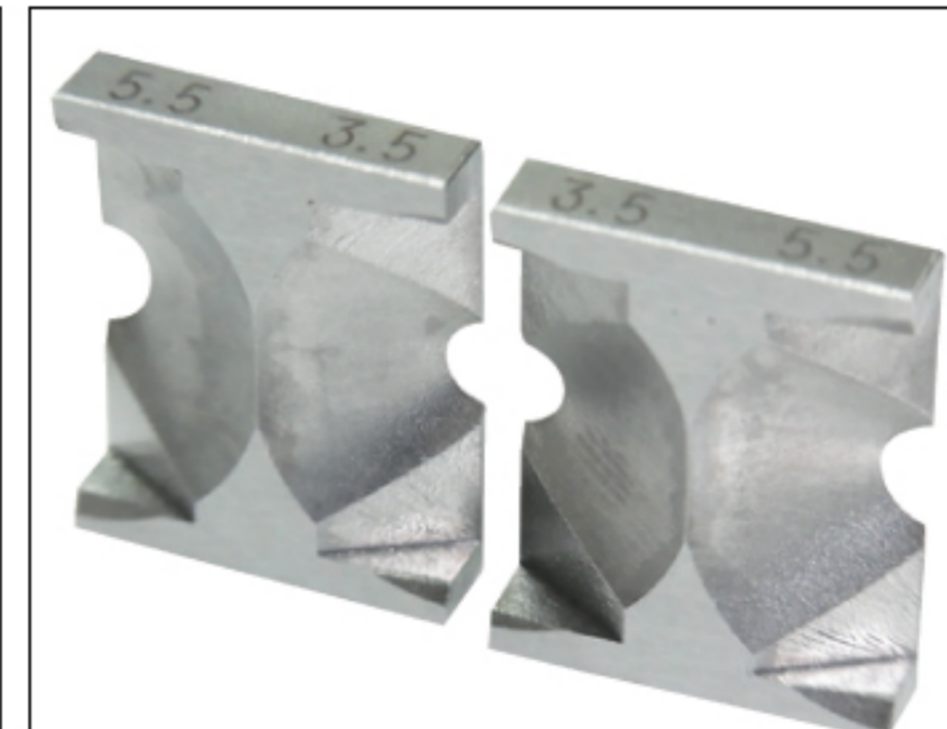

●RW3.5-5.5  
for 3.5sq•5.5sq

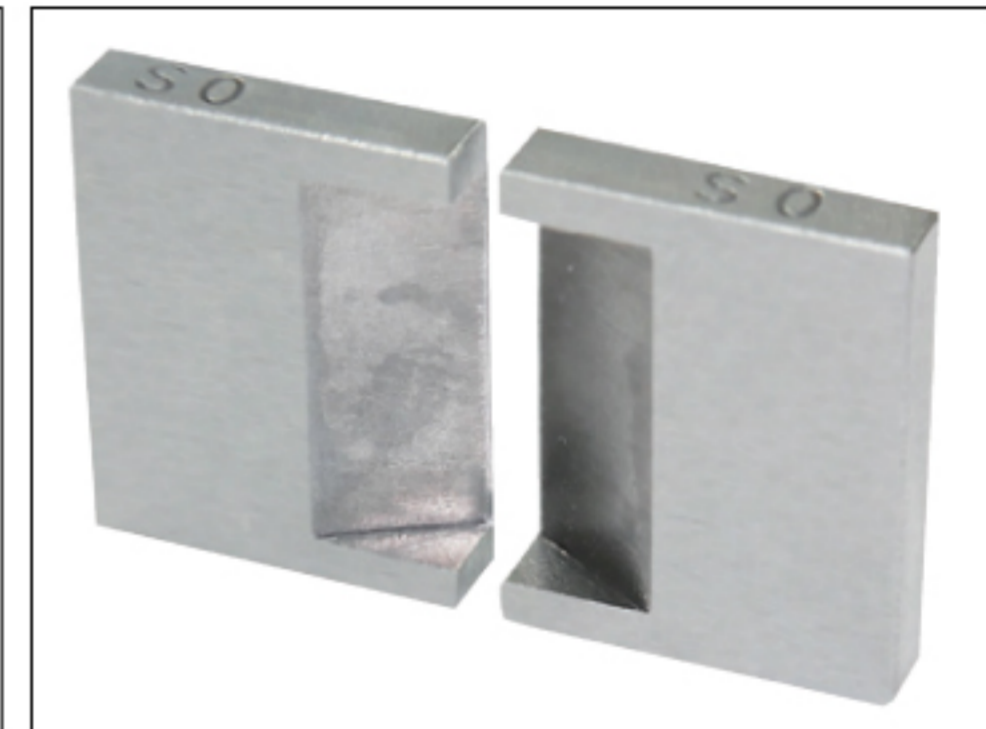

●S0  
for S zero


※It is possible to use two sizes in one set.

※Operate the stopper bolt, please use it to adjust the blade spacing.

## CST35

### For thin cable

It's suitable for the high-speed stripping of the thin cable.

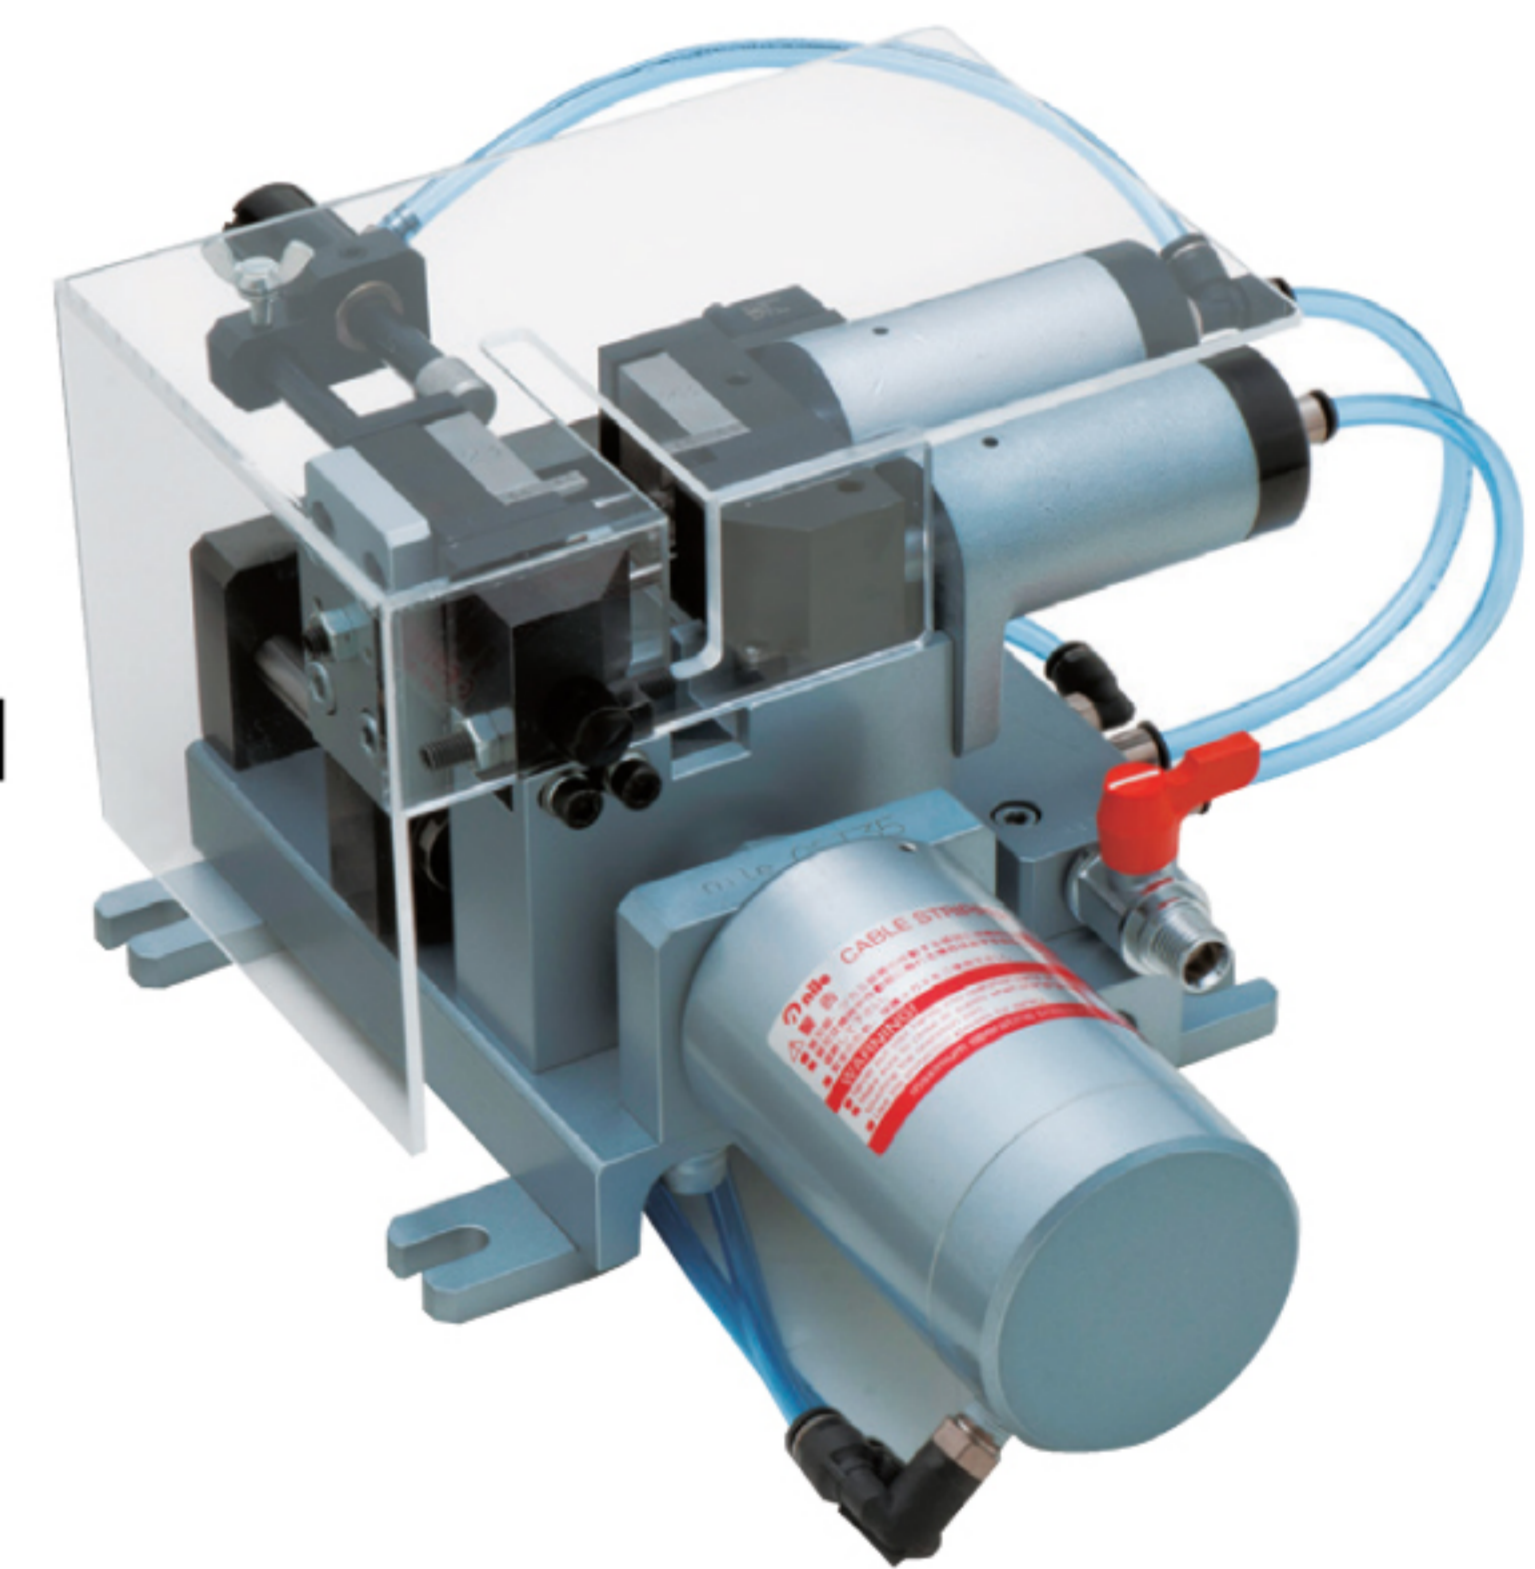


#### CST35 specification

Model	Length (mm)	Weight (kg)	Height (mm)	Width (mm)	Air consumption (cm <sup>3</sup> /stroke)	Air pressure (MPa)	Stripping capacity $\phi$ (mm)	Stripping length (mm)
CST35	260	8	100	150	850	0.5~0.6	up to $\phi$ 5mm outer dia.	30

## CST100

### The most standard type

It can perform the complex stripping.

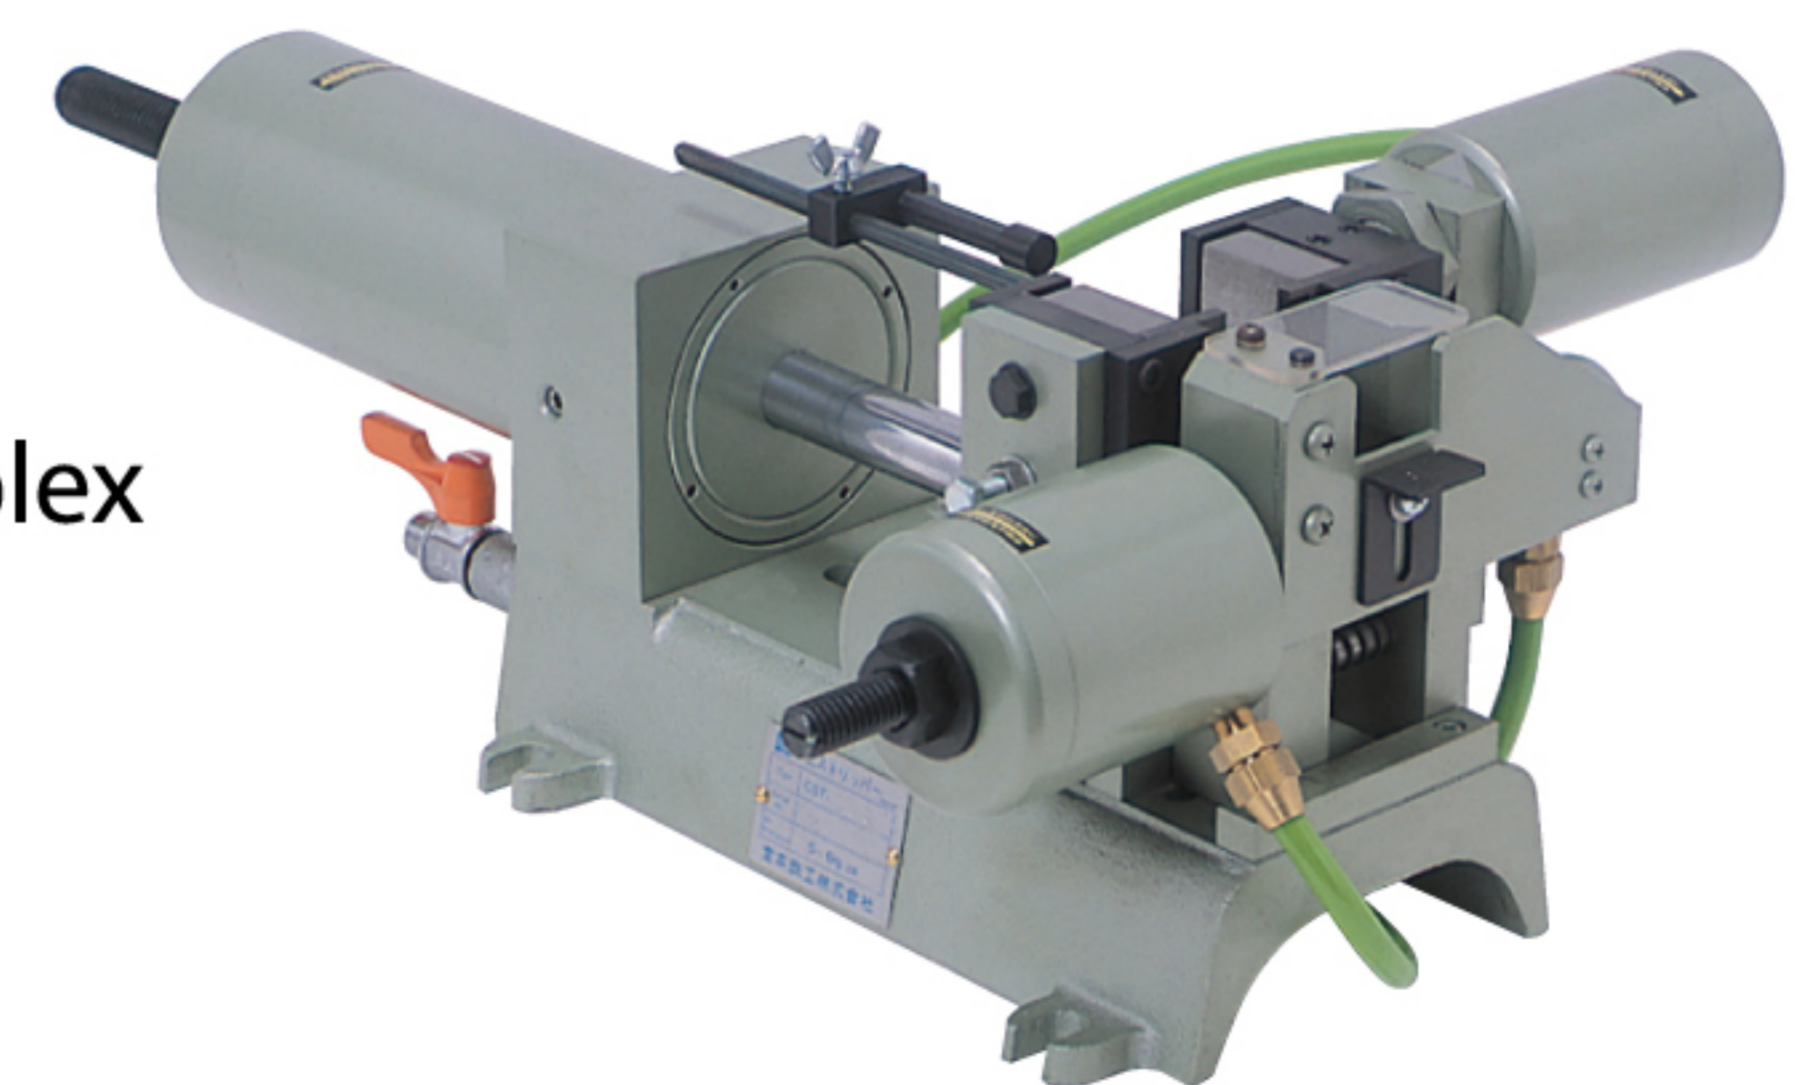

#### CST100 specification


Model	Length (mm)	Weight (kg)	Height (mm)	Width (mm)	Air consumption (cm <sup>3</sup> /stroke)	Air pressure (MPa)	Stripping capacity $\phi$ (mm)	Stripping length (mm)
CST100	420	13.5	169	318	3,000	0.5~0.6	up to $\phi$ 15mm outer dia.	100

## Cable Strippers

### CST110

#### Improvement of type CST100

Safety cover is attached.  
It can smoothen the discharge of waste.

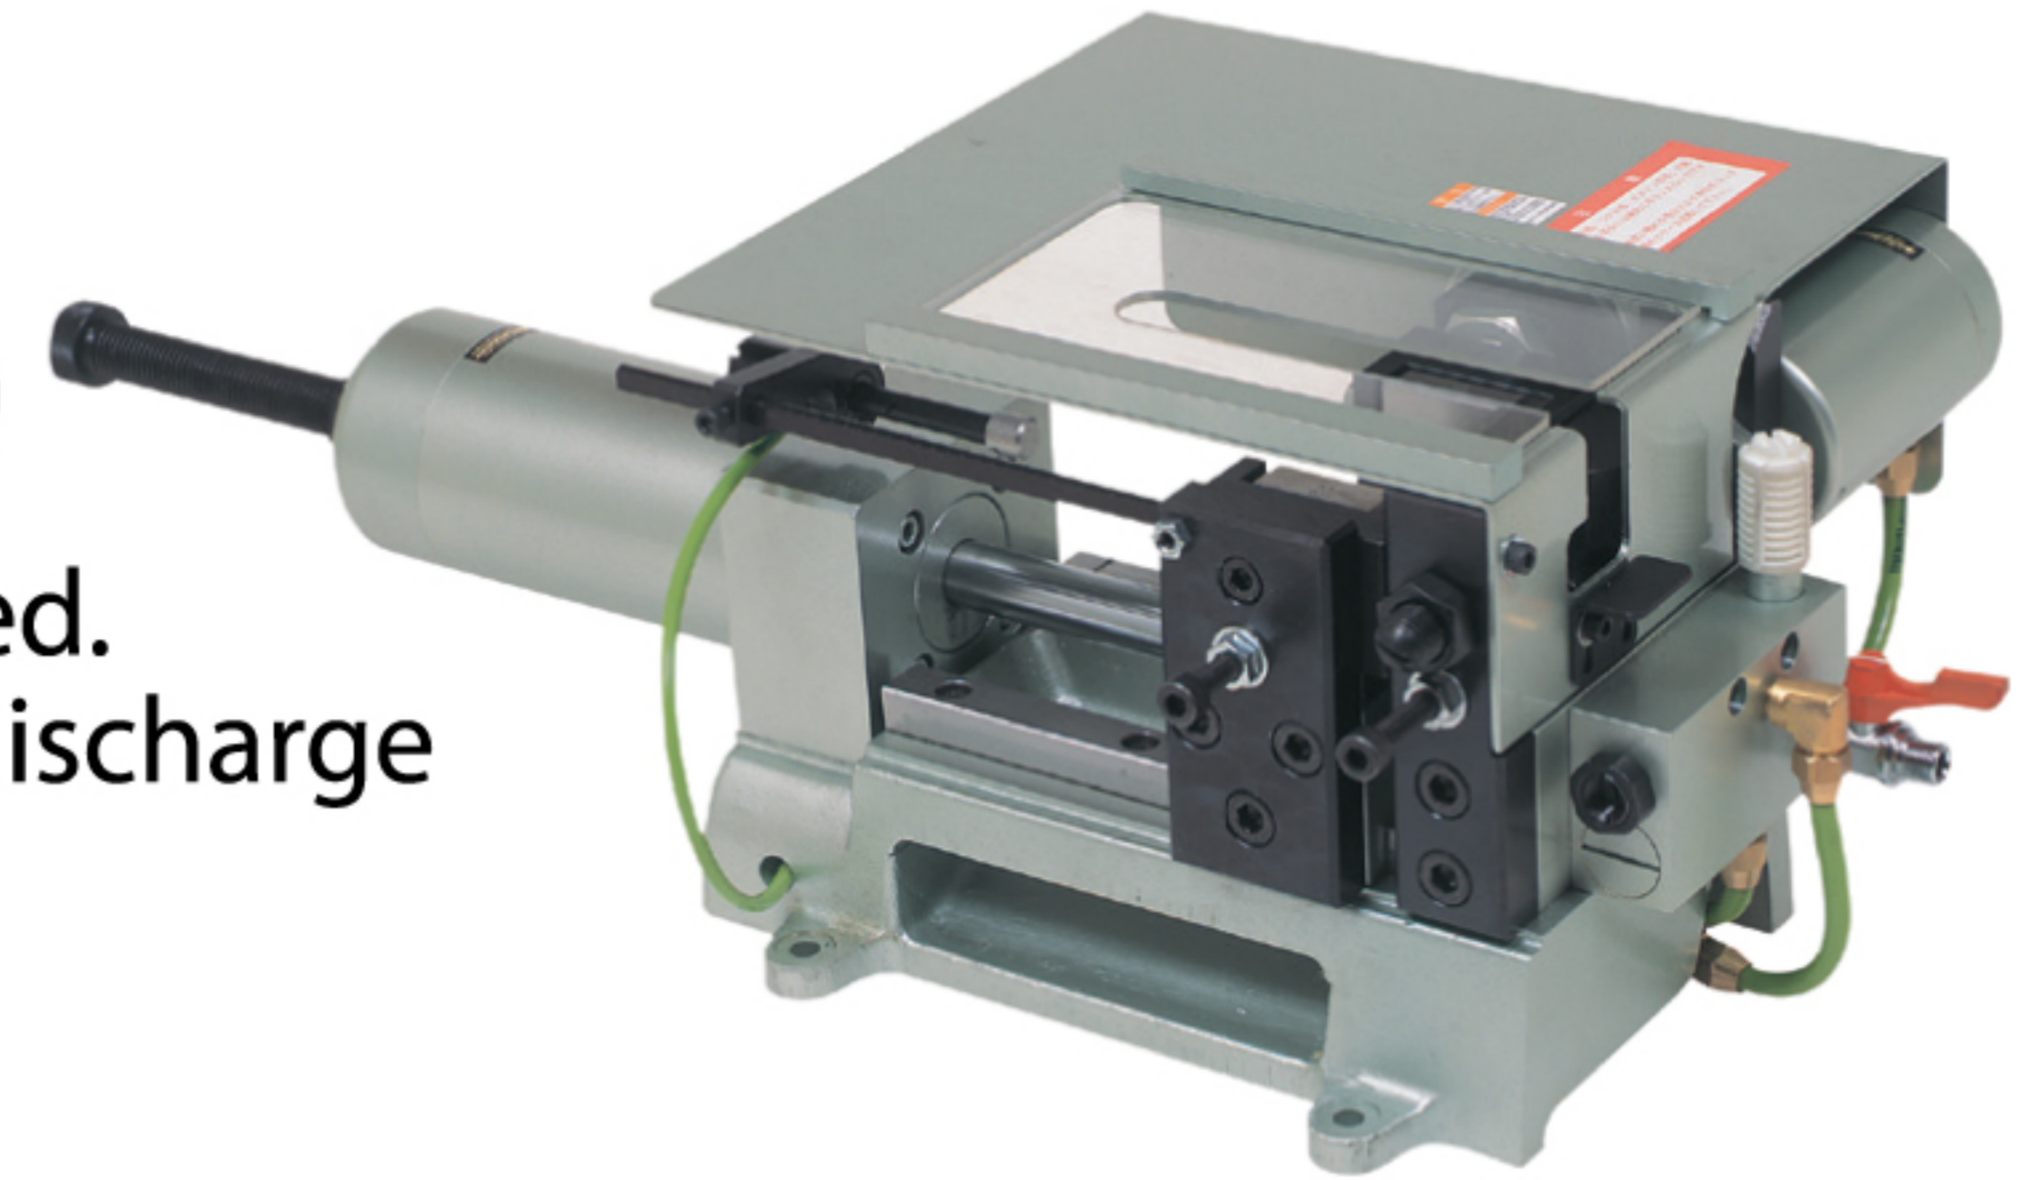

#### CST110 specification

Model	Length (mm)	Weight (kg)	Height (mm)	Width (mm)	Air consumption (cm <sup>3</sup> /stroke)	Air pressure (MPa)	Stripping capacity $\phi$ (mm)	Stripping length (mm)
CST110	470	21	200	275	3,100	0.5~0.6	up to $\phi$ 15mm outer dia.	100

### CST100L

#### Long type

It is suitable for stripping long dimension cable.




#### CST100L specification

Model	Length (mm)	Weight (kg)	Height (mm)	Width (mm)	Air consumption (cm <sup>3</sup> /stroke)	Air pressure (MPa)	Stripping capacity $\phi$ (mm)	Stripping length (mm)
CST100L	785	18	155	300	5,872	0.5~0.6	up to $\phi$ 15mm outer dia.	200

### CST120

#### Large type

It is suitable for stripping of large diameter cable.

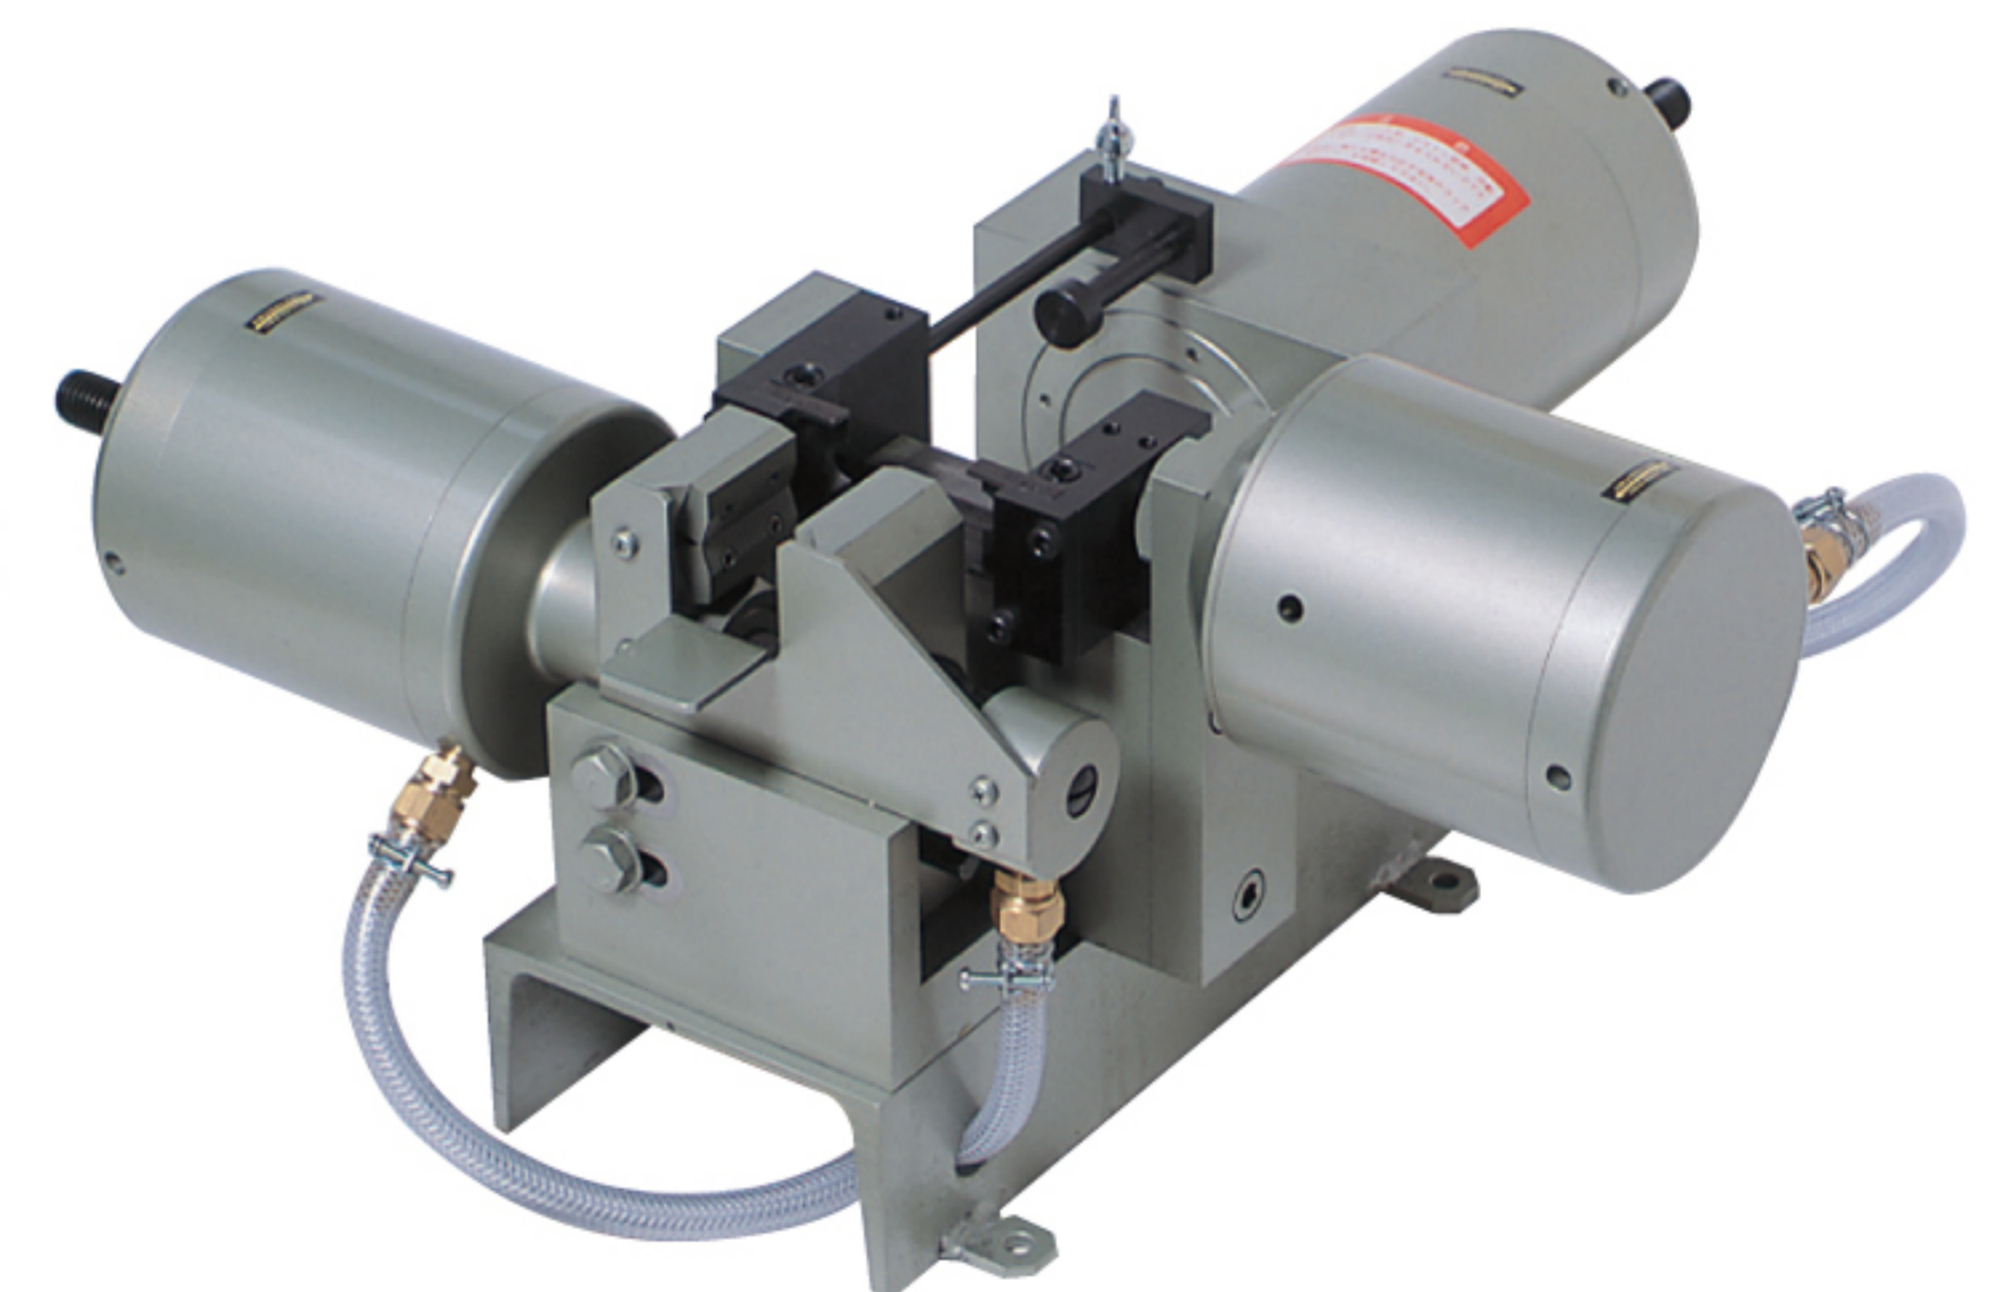

#### CST120 specification

Model	Length (mm)	Weight (kg)	Height (mm)	Width (mm)	Air consumption (cm <sup>3</sup> /stroke)	Air pressure (MPa)	Stripping capacity $\phi$ (mm)	Stripping length (mm)
CST120	487	43	282.5	493	8,000	0.5~0.6	up to $\phi$ 30mm outer dia.	100